

UC01 说明书

尺寸：80*100MM

材质：封面157g双铜纸，封面过哑胶，内页70双胶纸

印刷要求：彩色印刷，字迹清晰

装订方式：骑马钉

版本号	更改位置	更改内容	更改人	更改日期	审核
A/1		内容更改		2019/01/17	



Specification

- Material: Zinc Alloy, PC + ABS & Stainless Steel
- Size: 49mm × 41mm × 74 mm
- Net Weight: 148 g
- Power Range: 5 W-300 W
- Standby Current: < 100 μA
- Voltage Range: 0.7 V-10.0 V
- Resistance Range: 0.1 Ω-3 Ω (VW) 0.1 Ω-1 Ω (TC)
- Temperature Range: 200 °F-600 °F / 100 °C-315 °C

The Kit Includes

- 1 × VALYRIAN II Mod
- 1 × Micro USB Cable
- 1 × User's Manual

Features

- Innovative SS904 TC mode, perfectly fits with the SS904L coil from UWELL.
- Triple 18650 batteries with maximum wattage of 300W.
- Each battery has separate battery chamber, safer to use.
- The PCBA is equipped with conformal coating which has excellent anti-corrosive properties, protect the core unit and prolong the life of mod.
- Reliable performance and fast firing (0.008S) from the new PCBA of UWELL.
- Smaller than most triple battery mods, ergonomic design for a comfortable grip.

Product Illustration

Please Read below Information before Use:

- Please choose good 18650 batteries from a reputable company with the minimum output current of 30A.
- Please make sure the tank is filled with enough e-liquid before vaping; after adding e-liquid, please let the tank sit for 10 minutes.

Battery Installation And Dismantlement

- Press and pull the battery cap to open.
- Install 3 18650 batteries (Attention: Do not reverse the battery, batteries shall be purchased separately.)
- Press and push the cap as the picture to lock the battery cap.

Mod Instructions

1. Power on/off

Click the fire button 5 times within 2 seconds to turn on/off the mod.

2. Vaping

While the device is on, hold the fire button to vape; it will automatically stop firing when the button is held for longer than 10s.

3. How to lock your device

- When the device is on, hold the fire button and "+" button for 2 seconds to lock/unlock the device.
- When the device is on, hold the fire button and "-" button for 2 seconds to lock/unlock the "+" button.

4. Select the mode

When the device is on, press the fire button 3 times within 2 seconds to enter the mode options, the mode will blink. Then press "+" button or "-" button to select work mode from "Power", "Temp" and "TCR"; press the fire button to confirm.

5. Power mode

After pressing the fire button to enter the power mode, press the "+" button to adjust the wattage or hold the button to scroll through them faster.

Attention: The output voltage will decrease gradually during vaping. When the output wattage can not reach the set wattage, the device will lower the wattage automatically, and then the screen will display the output voltage after automatically adjusting the wattage.

6. Temp mode

The Temp mode only fits with SS904L coils from UWELL.

- After pressing the fire button to enter the Temp mode, the power character will blink, the power adjustment range is from 10 to 120W, press the "+" button to adjust the wattage, press the fire button to confirm.
- Press the "+" button to adjust the temperature, when it reaches to the end of the range, it will round robin.

7. TCR

TCR mode only fits with DIY coils.

- After pressing the fire button to enter the TCR mode, the TCR flashes, TCR range: 0.00010 - 0.01000.
- Recommended TCR of common heating wire material: SS316: 0.00088 ± 0.00020; Ni 200: 0.00690 ± 0.00020.
- After pressing the fire button to confirm the TCR, the wattage will flash. The power adjustment range is from 10 to 120W, press the "+" button to adjust the wattage, press the fire button to confirm.

8. Set the reference resistance under temperature control mode

In the temperature control mode, when the atomizer with the temperature control material is installed, it will correct the reference resistance. Resistance detection is required after switching to the TC mode. It should be used at room temperature or vaping experience under TC mode would not be as expected. After switching atomizer, press the fire button and the screen will ask if it's new coil, if it is, please press the "+" button; if not, please press the "-" button.

9. Resistance detection

Resistance detection shall be done automatically. The operation mode would be saved as previous setting. Resistance range is 0.1-3Ω (VW) and 0.1-1Ω (TC).

a. If there is no atomizer or the resistance of the coil is too high, press the fire button the screen will indicate open circuit.

b. If the resistance of the coil is too low, press the fire button the screen will indicate short circuit.

10. Low power alert

When the voltage is too low, press the fire button the screen will indicate low battery.

11. Temperature protection

The output will be cut off if the PCBA temperature increase to 80°C during vaping, the screen will display "Too Hot! Please Wait"; 10 seconds later, you are free to vape again.

12. Reverse battery protection

The device is equipped with reversed battery protection. If the batteries are reversed, the device can not turn on.

13. Charging

Charge battery with Micro USB of 5V/2A, the screen will indicate charging; when the battery is fully charged, the screen will display full bars.

14. Factory reset

Hold the fire button, "+" and "-" button for 3 seconds the screen will display "Factory Reset", release the buttons the screen will exit to the power mode.

Attention

- Please choose certified high-quality batteries with the minimum output current of 30A. The batteries with the same brand and model would be recommended. Do not use a battery with a torn casing. Please note the recycling safely disposal of used batteries.
- Please charge with certified high-quality adaptor and a Micro USB cable with the charging current of 5V/2A.
- Please do not vape or remove the battery during charging, the device and adaptor may warm up when charging, keep away from flammable and explosive goods.
- Please use a dry and soft cloth to clean the device. Keep away from water or any liquids.
- Please do not put the device in your pocket with other hard objects to avoid damages.
- Please turn off the device when it is not in use, please remove the batteries when it is not in use for a long time.
- If you want to use the recommended wattage then please fully open the airflow holes. If you want to use less airflow, we suggest you lower the wattage.
- Don't disassemble the device.
- Avoid high temperature, low temperature and humidity during use or storage to avoid damage to the equipment.
- The product parameters or pictures in this manual are for illustration purpose only, please refer to the actual product.

Safety Instruction

Please read the following safety instructions carefully before using the product.

- This product is only available to people who have reached the legal age of smoking. It is strictly forbidden for young children, pregnant women and women during breastfeeding or for patients with heart disease, high blood pressure, diabetes, depression and asthma.
- Please put the product out of reach of children and pets to avoid injury.
- When using this product, please keep away from inflammable and explosive materials to avoid injury.

4. The company does not assume any responsibility for any equipment damage or personal injury caused by user misuse.

Warranty Details

Please keep the anti-counterfeit code and proof of purchase after purchasing the product. The warranty period is 180 days from the date of purchase. Our company provides warranty service (Device and atomizer only, exclude coil head and pod cartridge). Please note that any of the following conditions are not covered by the warranty:

- Exceeding the warranty period.
- Damage caused by the use, maintenance, and storage that is not in accordance with the requirements as instructed.
- Damage caused by unauthorized repair.
- Damage caused by the usage of non-UWELL components.
- Damage caused by force majeure.

Verification

- Visit the UWELL official website www.uwell.com through a smartphone or PC.
- Please enter the 16 digits authentic code, and the result will be displayed in a few seconds.
- Please feel free to contact UWELL via e-mail, phone or website for more help.

Customer Service

We pride ourselves on manufacturing quality products and providing excellent customer service. For any issues, please contact us at service@myuwell.com.

*UWELL reserves the right of final interpretation in the user manual.

- 检查要求：
- 检查内容是否少印/错印/偏位
 - 字符颜色是否正确/清晰
 - 尺寸是否正确
 - 符合RoHS标准

优维		UC01说明书-印刷图			
日期	2019/03/15	表面处理	过哑膜		
名称	UC01说明书	零件编号	UC01-P020		
材质	封面157G铜版纸 内页 70G双胶纸	物料编码	206030160		
视角:	单位: MM	比例: 1:1	共1页 第1页	版本	A/0
设计:	审核:	批准:			






版本号	更改位置	更改内容	更改人	更改日期	审核
A3		内容更改		2019.01.08	
A4		内容更改		2019.03.05	

尺寸：80*80MM

材质：封面157g双铜纸，封面过哑胶，内页70双胶纸

印刷要求：彩色印刷，字迹清晰

装订方式：骑马钉

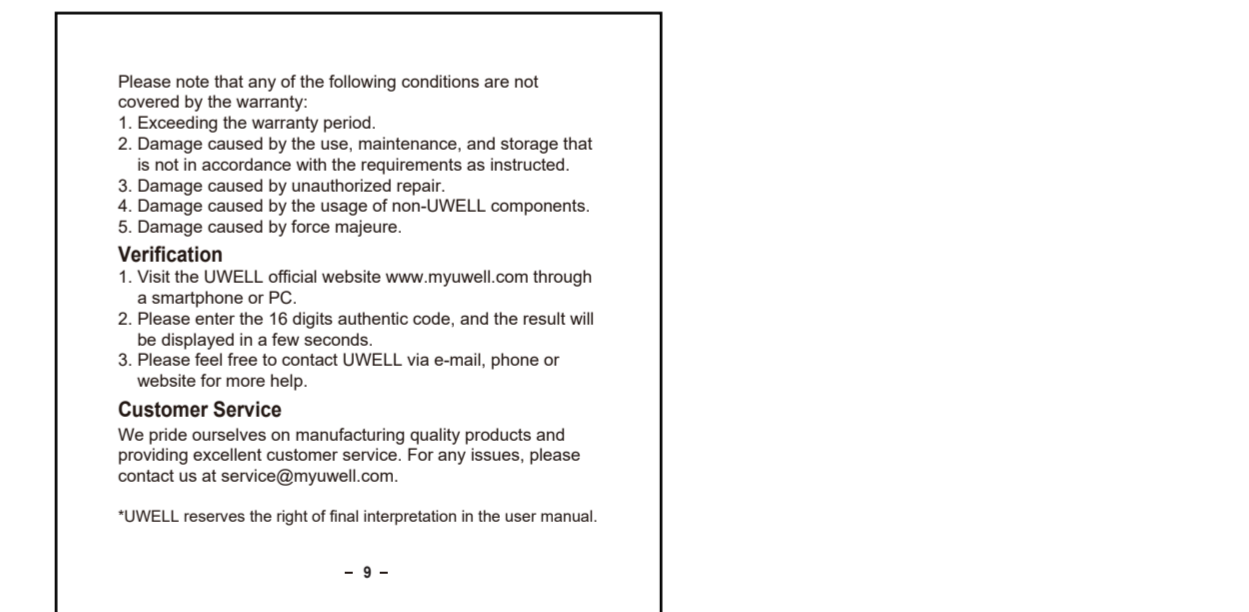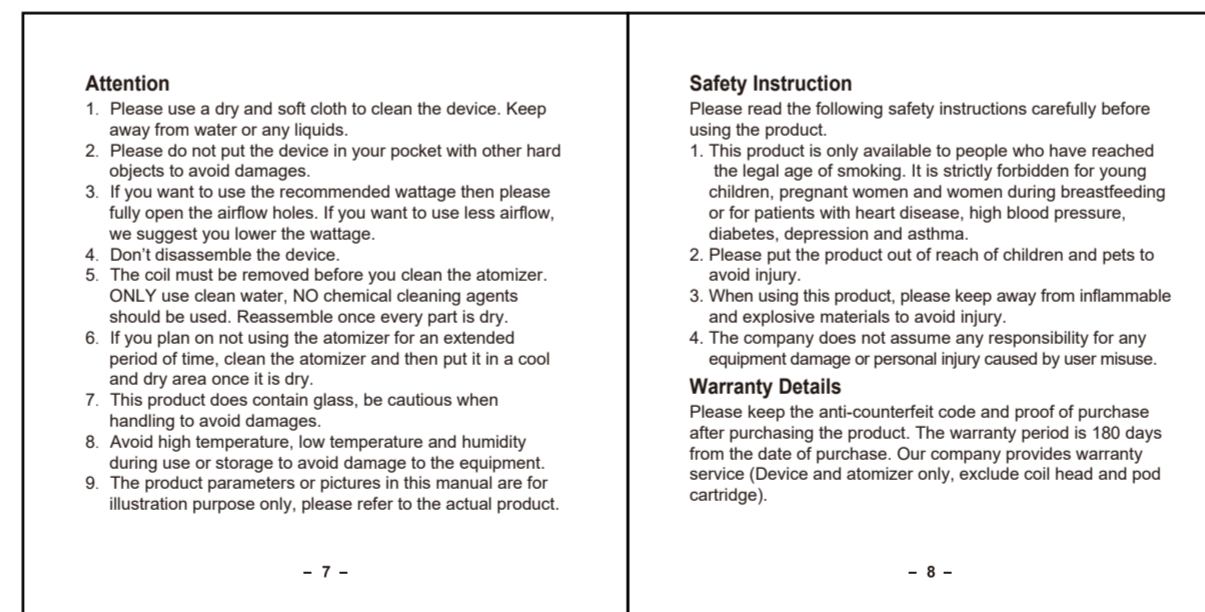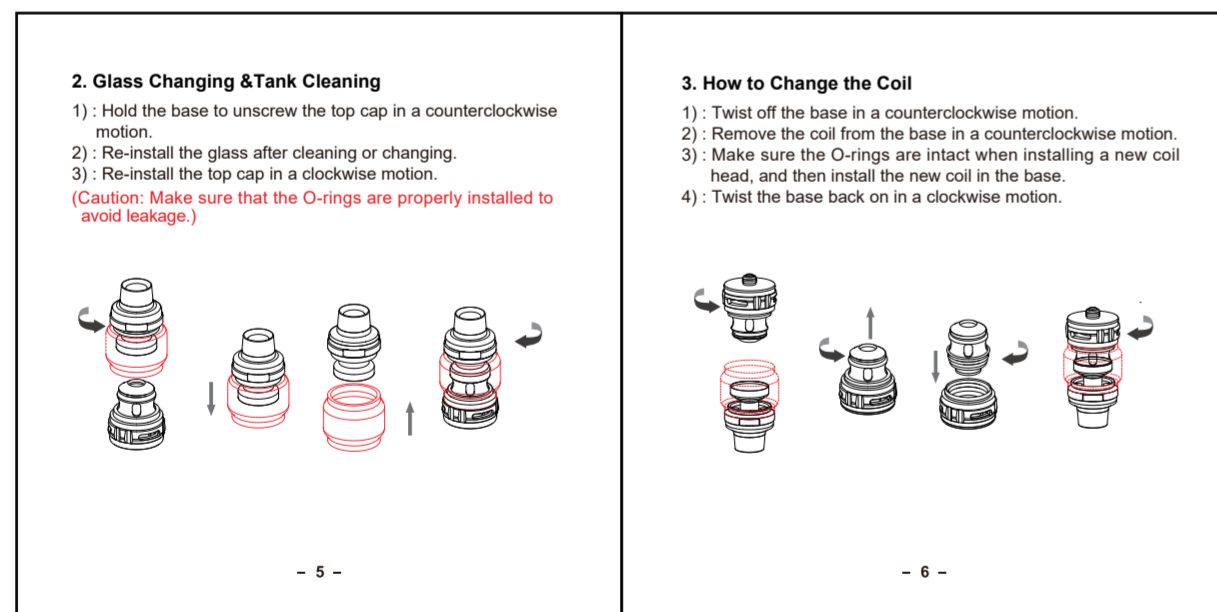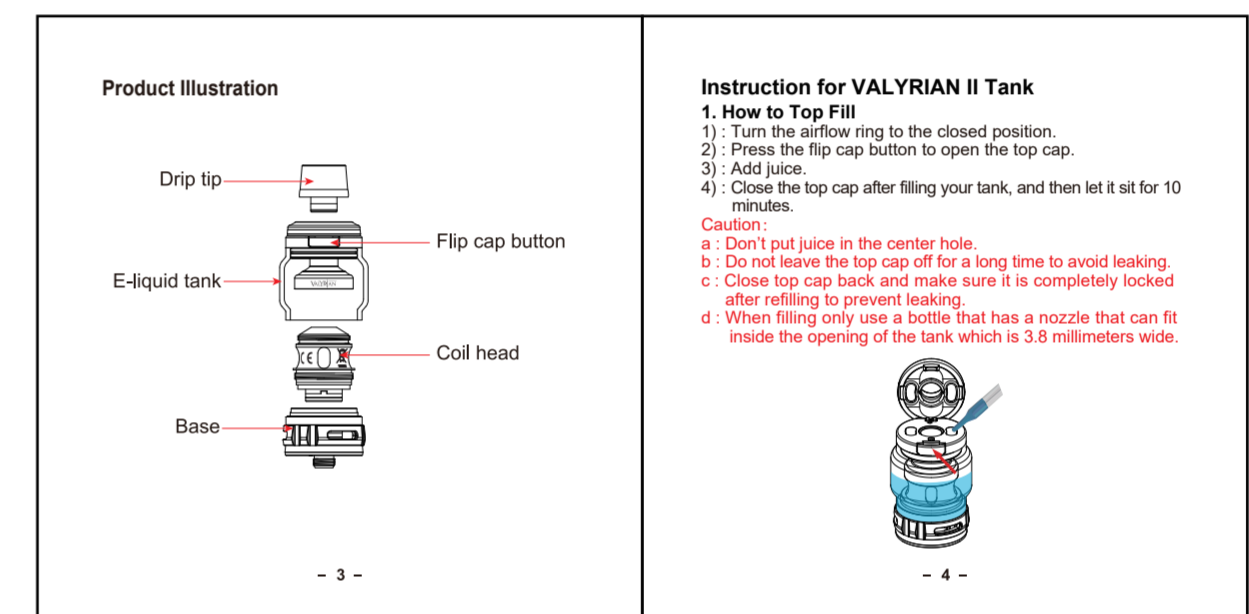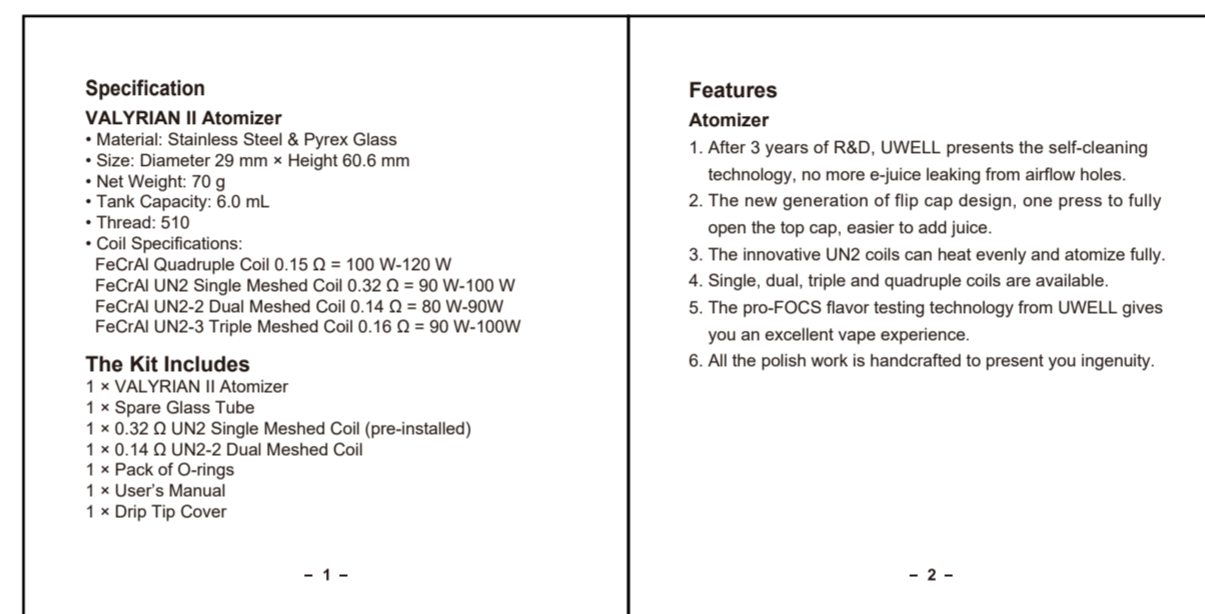

- 检查要求：
- 1.检查内容是否少印/错印/偏位
 - 2.字符颜色是否正确/清晰
 - 3.尺寸是否正确
 - 4.符合RoHS标准

YA11雾化器说明书-印刷图					
日期	2019/03/05	表面处理	过哑膜		
名称	YA11雾化器说明书	零件编号	YA11-P004		
材质	封面157G铜版纸 内页70G双胶纸	物料编码	206030167		
视角:	单位: MM	比例: 1:1	共1页 第1页	版本	A/4
设计:		审核:		批准:	